


## *“Sectional fire rated doors”*

*provide good insulation, fast and silent operation where as protect you against fire.*

# SECTIONAL FIRE RATED DOOR

## PANEL COLOR

Gray

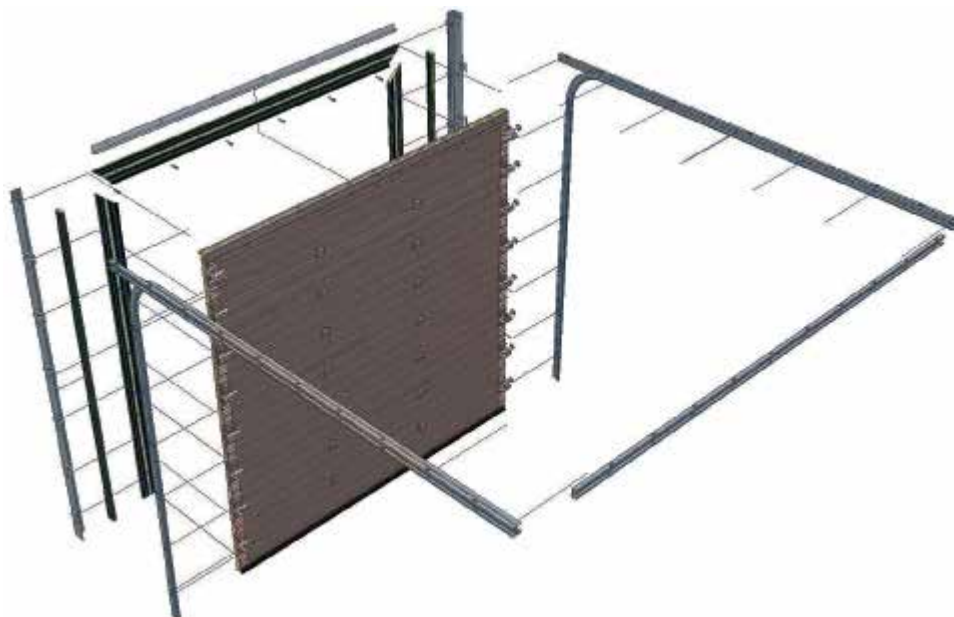


- Air and Water tightness
- Special design, patented frame, 18x120 mm

## ROLLER

- 2" galvanized steel roller




## Panel Structure

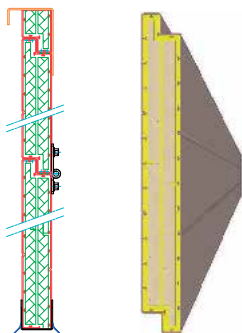


## PANEL

- Thickness: 40 mm
- Weight 38 kg/m<sup>2</sup>
- Height: 300 mm

## Top View

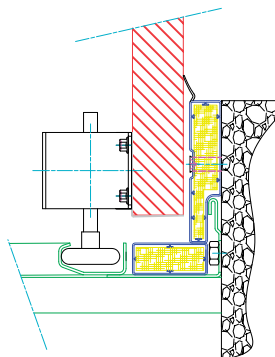

## Side View



## MOTOR (Electrically or Hydraulically depending on size)

- 380 Vac, 0,55 kW
- In the case of fire, an additional 24V motor, powered by a lowvoltage emergency supply facility, ensures that the door closes properly.

## CERTIFICATION

- 60 Minutes RF60, EI60, EW60

